

# DuPont™ Zytel® PLS93G35DH1 BK261

## ZYTEL® PLUS NYLON RESIN

### Product Information

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

**Zytel® PLS93G35DH1 is a 35% glass fiber reinforced, DuPont™ SHIELD protected polyamide 6 for injection molding. It provides exceptional welding resistance and excellent heat resistance.**

General information	Value	Unit	Test Standard
Resin Identification	PA6-GF35	-	ISO 1043
Part Marking Code	PA6-GF35	-	ISO 11469
Rheological properties	dry / cond	Unit	Test Standard
Molding shrinkage, parallel	0.2 / -	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7 / -	%	ISO 294-4, 2577
Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	11500 / 6500	MPa	ISO 527-1/-2
Stress at break	197 / 120	MPa	ISO 527-1/-2
Strain at break	3.5 / 7	%	ISO 527-1/-2
Flexural Modulus	10100 / -	MPa	ISO 178
Flexural Strength	309 / -	MPa	ISO 178
Charpy impact strength			ISO 179/1eU
73 °F	96 / 93	kJ/m <sup>2</sup>	
-22 °F	81 / 83	kJ/m <sup>2</sup>	
Charpy notched impact strength			ISO 179/1eA
73 °F	15 / -	kJ/m <sup>2</sup>	
-22 °F	13 / -	kJ/m <sup>2</sup>	
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature, 18 °F/min	224 / *	°C	ISO 11357-1/-3
Temp. of deflection under load			ISO 75-1/-2
260 psi	212 / *	°C	
65 psi	220 / *	°C	
Coeff. of linear therm. expansion, parallel	20 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	85 / *	E-6/K	ISO 11359-1/-2
Flammability	Value	Unit	Test Standard
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<100	mm/min	ISO 3795 (FMVSS 302)
Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	>1E13 / 7.1E11	Ohm*m	IEC 62631-3-1
Surface resistivity	* / 6.1E13	Ohm	IEC 62631-3-2
Comparative tracking index	550 / -	-	IEC 60112
Other properties	dry / cond	Unit	Test Standard
Humidity absorption, 80mil	2 / *	%	Sim. to ISO 62
Density	1400 / -	kg/m <sup>3</sup>	ISO 1183
Injection	dry / cond	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-



# DuPont™ Zytel® PLS93G35DH1 BK261

## ZYTEL® PLUS NYLON RESIN

Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	270	°C	-
Min. melt temperature	260	°C	-
Max. melt temperature	280	°C	-
Max. screw tangential speed	0.2 / *	m/s	-
Mold Temperature Optimum	100	°C	-
Min. mold temperature	70	°C	-
Max. mold temperature	120	°C	-
Hold pressure range	50 - 100	MPa	-
Hold pressure time	3	s/mm	-
Ejection temperature	150	°C	-

### Characteristics

Processing	<ul style="list-style-type: none"><li>• Injection Molding</li></ul>
Special characteristics	<ul style="list-style-type: none"><li>• Heat stabilized or stable to heat</li></ul>

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

#### Asia Pacific

TEL: +86 0769-82339888 / 87798999

#### Europe/Middle East/Africa




# DuPont™ Zytel® PLS93G35DH1 BK261

## ZYTEL® PLUS NYLON RESIN

Diagrams


Stress-strain (dry)

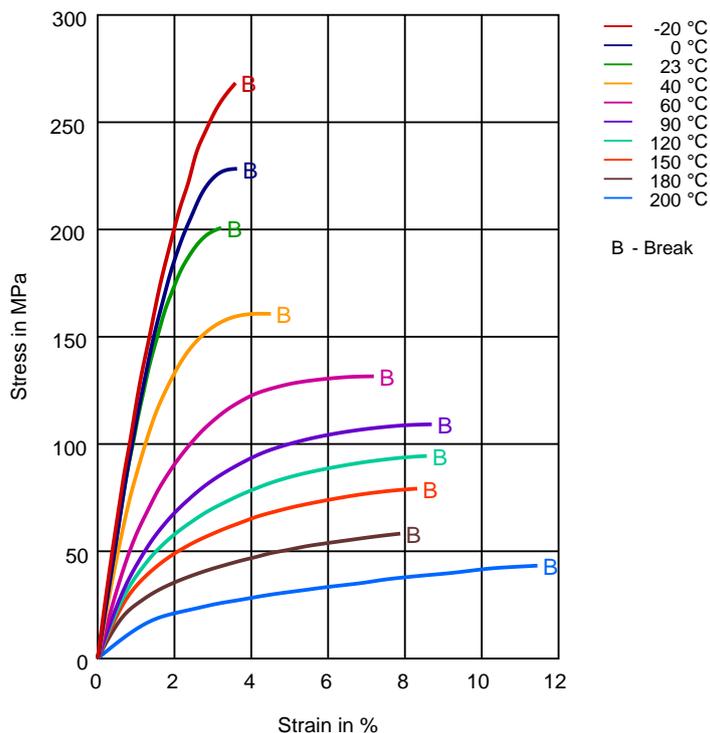

# DuPont™ Zytel® PLS93G35DH1 BK261

## ZYTEL® PLUS NYLON RESIN

Stress-strain (cond.)

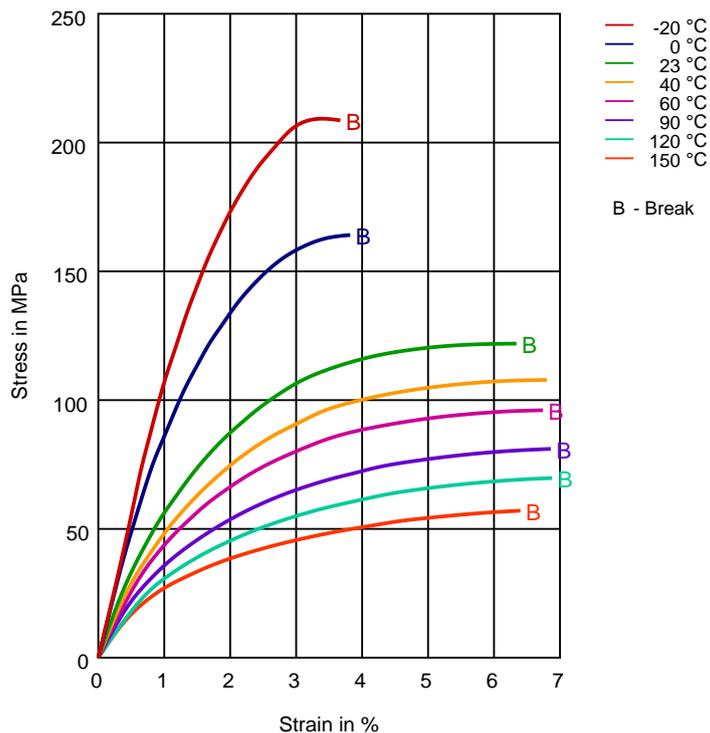

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



# DuPont™ Zytel® PLS93G35DH1 BK261

## ZYTEL® PLUS NYLON RESIN

Secant modulus-strain (dry)

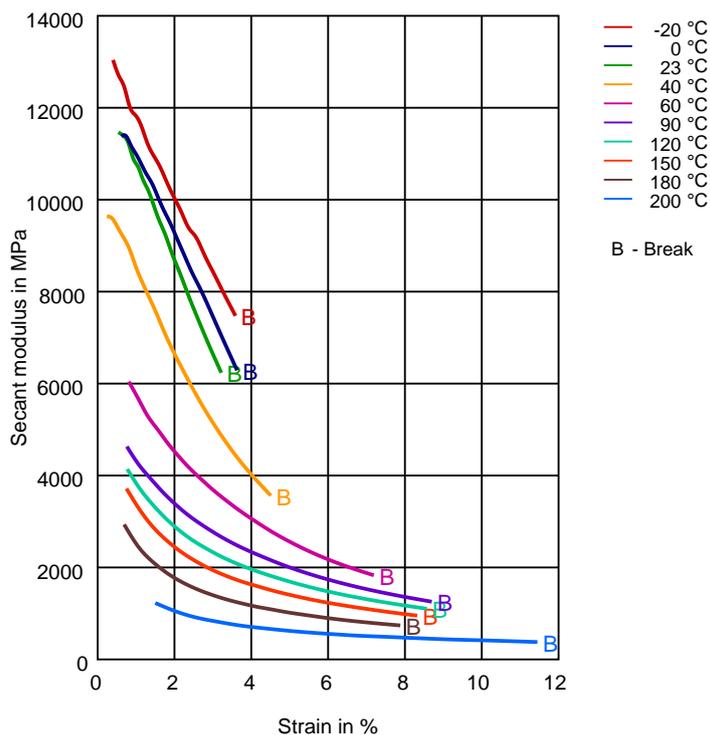

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



# DuPont™ Zytel® PLS93G35DH1 BK261

## ZYTEL® PLUS NYLON RESIN

Secant modulus-strain (cond.)

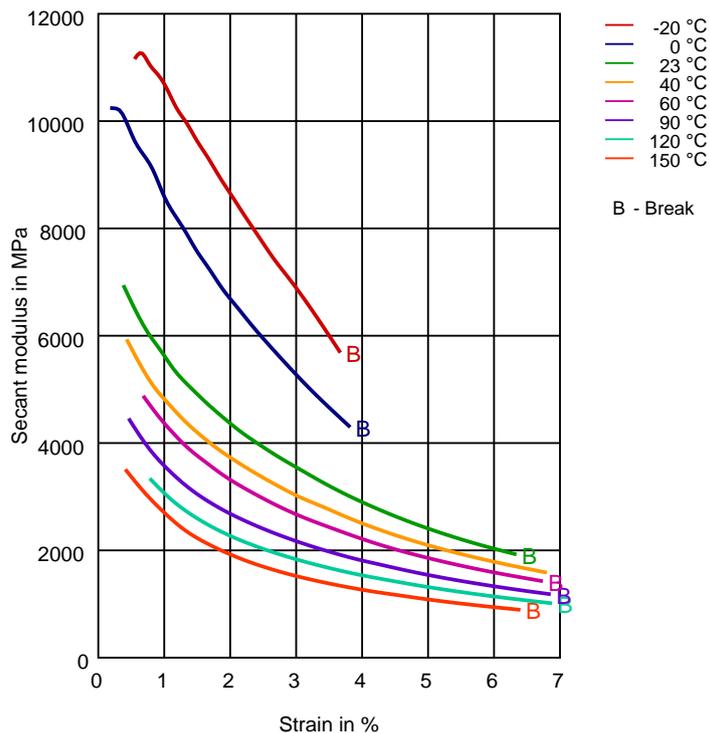

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



# DuPont™ Zytel® PLS93G35DH1 BK261

## ZYTEL® PLUS NYLON RESIN

### Chemical Media Resistance

#### Mineral oils

✓ SAE 10W40 multigrade motor oil (130°C)

#### Other

✗ Water (90°C)

#### Symbols used:

✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

#### Asia Pacific

TEL: +86 0769-82339888 / 87798999

#### Europe/Middle East/Africa

